LCD DIGITAL MONITORING SPECIFICATIONS

Model: FQ-TV-xxxx | Panel BOE Display A+ | Cross-platform support | 4K UHD

Grade A commercial display solution – 24/7 continuous operation, industrial-grade durability

PRODUCT HIGHLIGHTS

4K	24/7	BOE	DIGITAL CONNECT
4K Ultra HD	**24/7 Operation**	**BOE A+ Panel**	**HDMI/ LAN**
3840×2160 ultra-sharp resolution	Non-stop, highly reliable	BOE Display Grade A+	Digital input





DETAILED TECHNICAL SPECIFICATIONS

Parameter	Value
Display Type	IPS LCD, LED Backlight (Non-Touch)
Screen Size	Long range support: 43/49/50/55/60/100 inch (diagonal)
Resolution	3840 × 2160 px (4K Ultra HD)
Panel Grade	Grade A – BOE Display Original A+
Brightness	350 cd/m² (nits)
Viewing Angle (H/V)	178° / 178° – Full Viewing
Aspect Ratio	16:9
Main Board (SoC)	Client Option
Memory / Storage	Client Option
Operating System	N/A
Connectivity	HDMI, USB
Operating Hours	24/7

Panel Lifespan	≥ 60,000 hrs (~6.8 yrs continuous)
Operating temperature	0°C – 60°C
Operating humidity	20% – 80% RH
Enclosure	Premium material alloy – impact-resistant, good heat dissipation
Power Supply	AC 100–240V / 50–60 Hz (Universal)
Brand	Fast Queue
Product family	FQ-TV series
Model	FQ-TV-xxxx
Part number	FQ-TV-xx-xxx
Manufacturer	Shenzhen Bada Vision Technology Co., Ltd
Importer / Distributor	BadaVision Vietnam
Country of origin	China


WARRANTY & TECHNICAL SUPPORT

Warranty Period	18 months from acceptance date
Service Type	Carry-in warranty service at Fast Queue
Response Time	≤ 24 business hours from incident report
Resolution Time	≤ 72 business hours (unit replacement if needed)
Technical Support	Hotline + Email + Remote (7 days/week)
Spare Parts	Guaranteed supply for 5 years post-delivery
Replacement	Repair or replacement at Fast Queue's discretion where repair is not technically or commercially practical


CERTIFICATIONS & QUALITY STANDARDS

Safety / EMC	CE / FCC / RoHS Compliant
Environmental Standard	RoHS 2.0 – Hazardous-substance free
Certificate of Origin	C/O (Certificate of Origin) available on request
Capability Profile	Provided in full per tender documentation requirements

50” DIMENSION STANDARD REFERRAL - FQ-TV50-1S

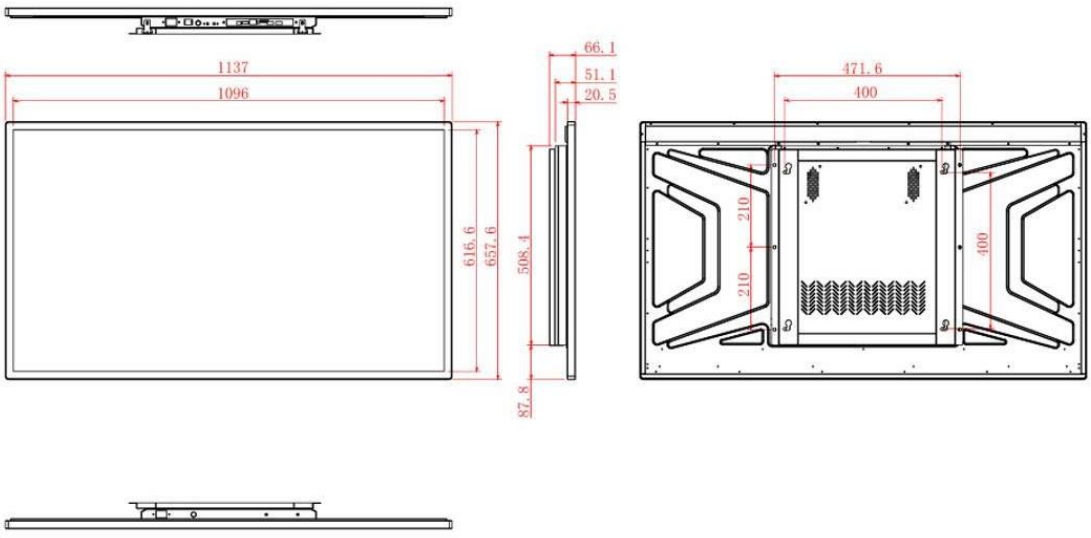

55” DIMENSION STANDARD REFERRAL - FQ-TV55-1S

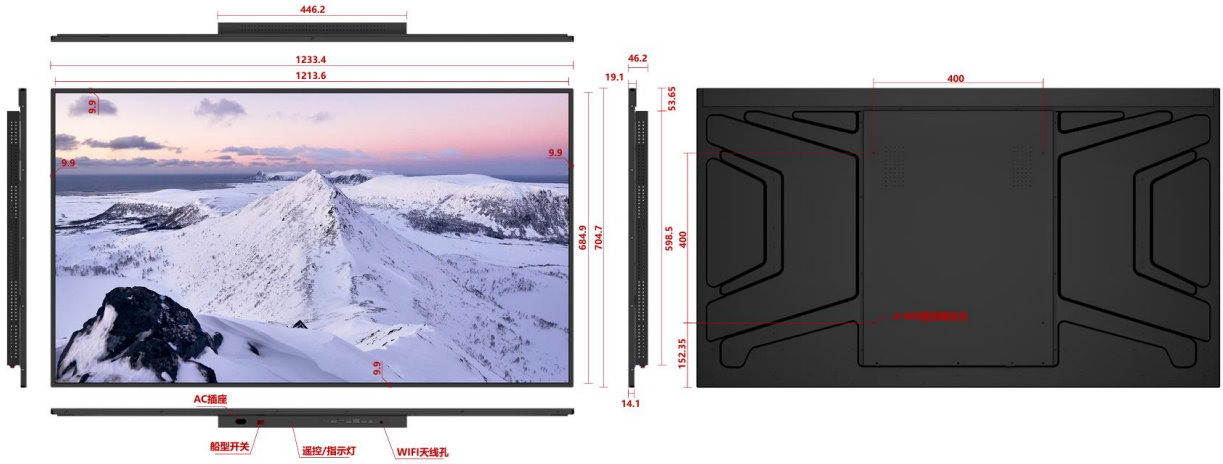

65” DIMENSION STANDARD REFERRAL - FQ-TV65-1S

